





Sump Pump

ST Series Sump Pump - ST1033



Features

- Cast iron/cast aluminum construction
- Continuous duty rated
- Energy efficient permanent split capacitor (PSC) motor
- Water cooled motor (no cooling oil)
- Stainless steel fasteners
- 10' Pump cord
- Will fit in 10" diameter sump pit

* 3 year warranty available when purchased and installed by a contractor, otherwise the original 18 mo. warranty is applicable

Energy Savings


Saves an average \$57 per year*



Specifications

Motor HP	1/3 HP
GPM @ 10 ft	46
GPH @ 10 ft	2770
Max head	29' / 8.8 m
Discharge	1.5" / 3.8 cm
Amps @ 10'	3.8
Weight	17 lbs / 7.7 kg
Width	7.5" / 19.1 cm
Depth	5" / 12.8 cm
Height	13.8" / 34.9 cm

Flow Chart

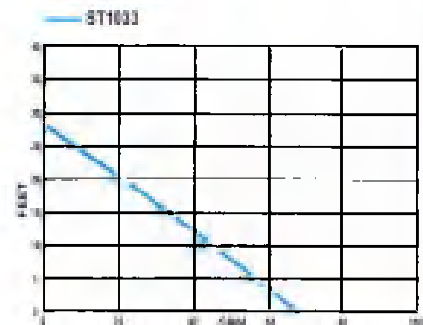

DFC2 - Deluxe Dual Float and Controller



Patented

Features

- Monitors pump and power conditions and sounds an alarm when problems are detected:
 - AC power has failed
 - Pump or float problem is detected
 - 9v battery is low or slide switch is off
- Visual notification and recommended maintenance remedy
- Float switch can be unplugged from controller for easy installation
- Activates pump weekly to exercise and extend pump life
- Pump run time is adjustable
- Includes export terminals for connecting to a remote dialer or home security system
- Adjustable run time from 5-45 seconds after the water level falls
- Piggy-back plug
- 4' power cord
- 10' float switch cord
- Universal controller mounting tabs

Includes: Dual Float Switch, Manual, Stainless steel hose clamp